


Rated voltage: 12 V **Capacity:** 33Ah C₁₀ at 25°C to 1.80V per cell

- * Designed service life of 10 years
- * World-wide compatibility
- * Easy maintenance with low operation cost
- * Easy installing and parameters readings
- * Wide operation temperature range
- * Superior low current discharge performance
- * Better safety performance and reliability
- * Modular and installation design
- * Environmental friendly

Size: 195x130x168

Weight: 11kg

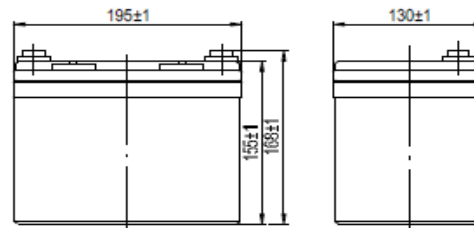


Application:

Telecommunication
 UPS
 Solar and wind power system
 Electric power, nuclear power
 Marine

Company Certificates

ISO 9001:2009
 ISO 14001:2005
 OHSAS 18001:2008

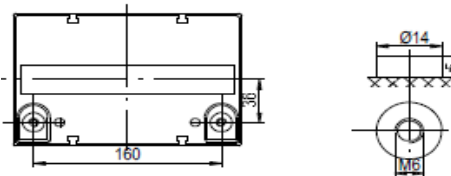

Technical details

Max discharge current:	330A (5sec)	Self-discharge:	less than 9% / 90 days @ 25°C
Internal resistance (charged):	10mΩ @ 25°C	Max charge current:	10A
Temperature range		Charge voltage at 20°C	Float: 2.26-2.30V Cycle: 2.40-2.45V
Application temperature:	-20°C ~ 60°C	Terminal output:	M6
Storage:	-20°C ~ 60°C	Container	ABS
Charge:	-10°C ~ 50°C		
Temperature compens.factor:	30 mV/°C		

Temperature effect on battery capacity: 105 % @ 40°C; 85 % @ 0°C; 60 % @ -20°C


Discharge current (A/25°C, 68°F):

End Voltage	5min	10min	15min	30min	1h	3h	5h	10h	24h
1,60	115	80,2	61,5	37,0	22,3	9,08	6,30	3,36	1,54
1,65	106	77,3	59,4	36,3	21,9	8,97	6,25	3,35	1,53
1,70	99,0	73,0	54,5	33,2	21,2	8,45	6,15	3,32	1,52
1,75	87,8	69,0	52,0	32,8	20,3	8,25	5,58	3,31	1,52
1,80	79,5	60,0	49,5	31,9	19,8	8,18	5,50	3,30	1,51


Discharge power (W/25°C, 68°F):

End Voltage	5min	10min	15min	30min	1h	2h	3h	5h	10h
1,60	215	150	117	72,4	40,9	23,3	17,4	12,2	6,63
1,65	207	145	110	69,3	40,5	23,1	17,3	11,9	6,47
1,70	185	136	107	64,5	39,9	22,6	16,8	11,5	6,31
1,75	170	132	103	62,7	39,1	21,8	16,0	11,3	6,20
1,80	155	116	97,9	61,0	38,3	21,0	15,2	11,0	6,03


Discharge curves

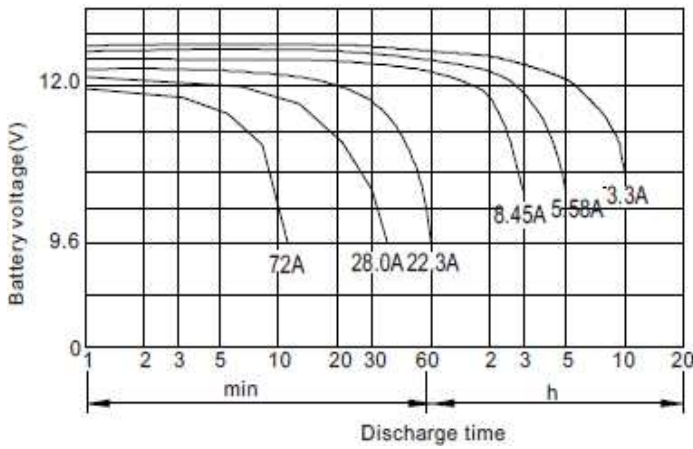

Temperature and capacity relation

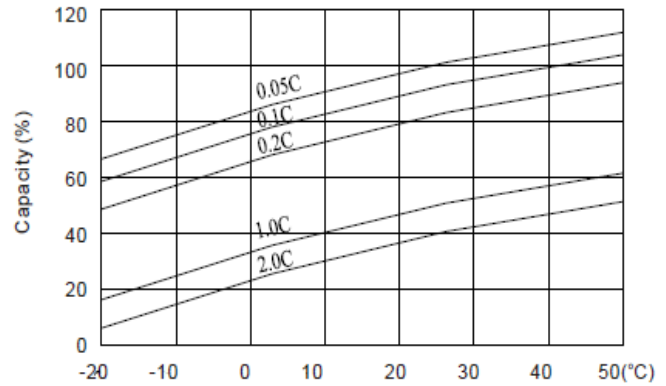

Selfdischarge at different temperature

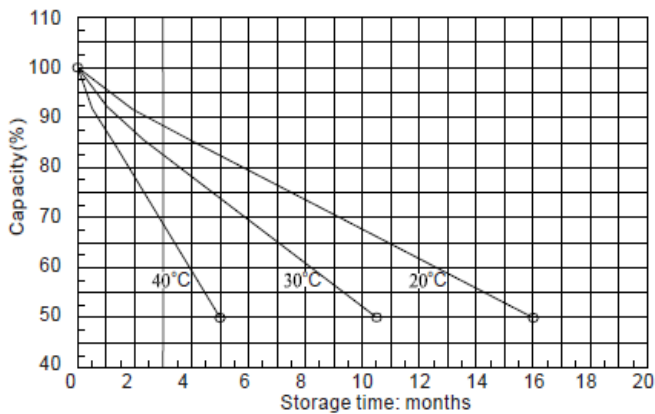

Constant voltage charge characteristic

