
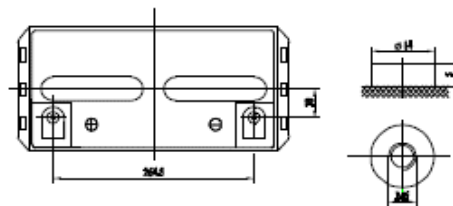


**Rated voltage:** 12 V    **Capacity:** 65Ah C<sub>10</sub> at 25°C to 1.80V per cell

- \* Designed service life of 10 years
- \* World-wide compatibility
- \* Easy maintenance with low operation cost
- \* Easy installing and parameters readings
- \* Wide operation temperature range
- \* Superior low current discharge performance
- \* Better safety performance and reliability
- \* Modular and installation design
- \* Environmental friendly

**Size: 350x167x179mm**

**Weight: 23kg**

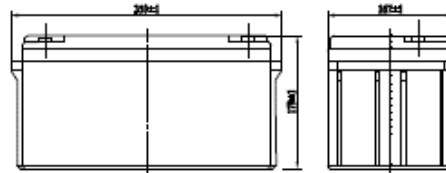

**Application:**

Telecommunication  
 UPS  
 Solar and wind power system  
 Electric power, nuclear power  
 Marine

**Company Certificates**

ISO 9001:2009  
 ISO 14001:2005  
 OHSAS 18001:2008



**Technical details**

<b>Max discharge current:</b>	650A (5sec)	<b>Self-discharge:</b>	less than 9% / 90 days @ 25°C
<b>Internal resistance (charged):</b>	6mΩ @ 25°C	<b>Max charge current:</b>	19,5A
<b>Temperature range</b>		<b>Charge voltage at 20°C</b>	Float: 2.26-2.30V Cycle: 2.40-2.45V
<b>Application temperature:</b>	-20°C ~ 60°C	<b>Terminal output:</b>	M6
<b>Storage:</b>	-20°C ~ 60°C	<b>Container</b>	ABS
<b>Charge:</b>	-10°C ~ 50°C		
<b>Temperature compens.factor:</b>	30 mV/°C		

**Temperature effect on battery capacity:**    105 % @ 40°C; 85 % @ 0°C; 60 % @ -20°C

**Discharge current (A/25°C, 68°F):**



End Voltage	5min	10min	15min	30min	1h	3h	5h	10h	24h
1,60	215	160	125	70,5	44,2	17,7	12,1	7,01	3,20
1,65	203	151	116	68,0	41,9	17,1	11,7	6,90	3,12
1,70	191	143	114	66,3	41,5	16,9	11,5	6,76	3,06
1,75	178	132	108	66,2	40,9	16,7	11,3	6,61	2,97
1,80	165	120	100	61,8	38,3	16,3	11,1	6,50	2,86

**Discharge power (W/25°C, 68°F):**

End Voltage	5min	10min	15min	30min	45min	1h	2h	3h	5h
1,60	381	282	222	132	98	80,8	46,1	34,5	22,8
1,65	359	267	206	127	97	79,0	45,1	33,8	22,6
1,70	337	252	197	118	95	77,2	44,6	33,7	22,4
1,75	315	237	193	116	92	75,4	43,2	32,4	22,0
1,80	294	220	183	114	91	75,0	42,5	31,7	21,7

**Discharge curves**

**Temperature and capacity relation**

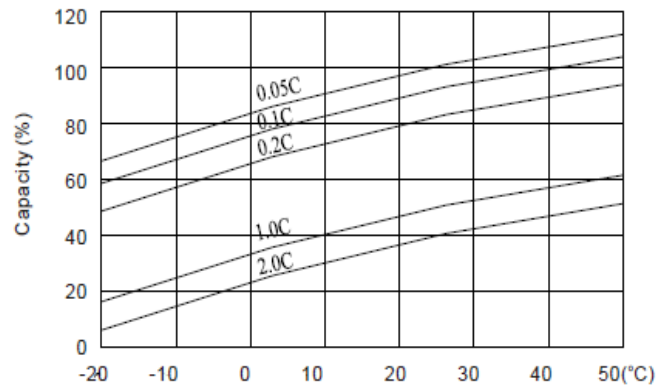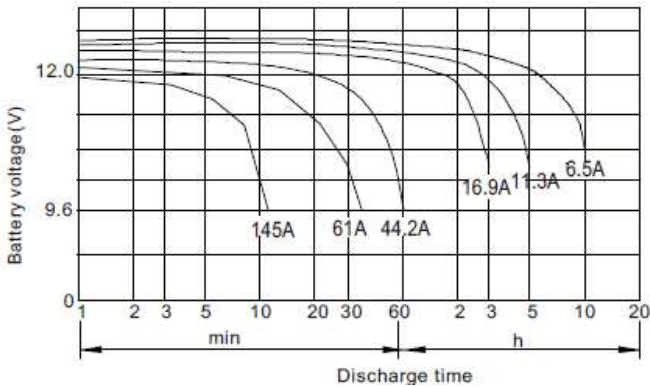

**Selfdischarge at different temperature**

**Constant voltage charge characteristic**

